


NON-CONTACT HIGH VOLTAGE DETECTOR Model 275HVD

The Model 275HVD is designed to detect the presence of high voltage without physical contact.

An eight position rotary switch selects the detection range. As the sensor is moved closer to the voltage carrying conductor, its sensor head picks up the radiated electric field. Once the range threshold is reached, the buzzer sounds and a bright red warning light warns the operator of live conductors.

The Model 275HVD is powered by three standard Alkaline C cell batteries and can be used both in- and out-of-doors. A universal spline on the back-end facilitates attachment to any standard hot stick. A self-test position ensures that all circuitry and annunciators are working properly before use.

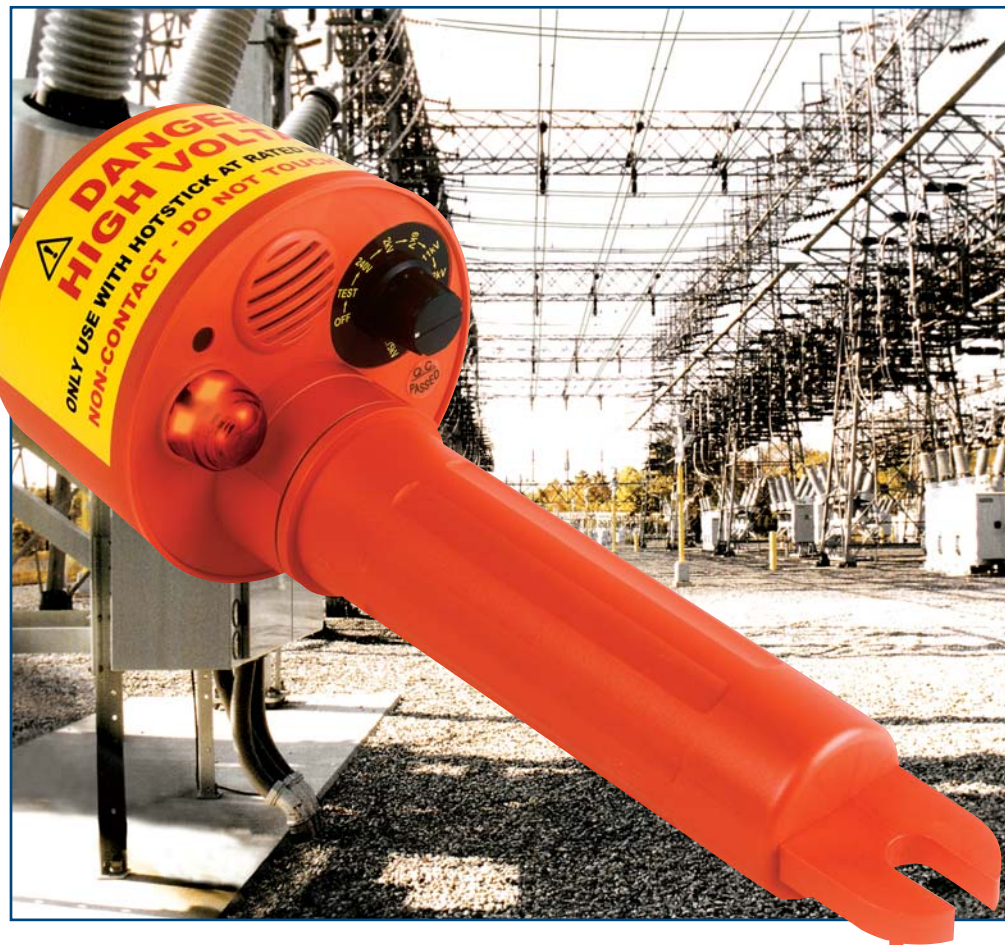

CE

- Non-contact voltage detector
- Wide range of detection; finds 80V to 275kV; one instrument fits all applications
- Eight switch selectable voltage ranges
- Lightweight, minimizes sway at the end of long hot sticks
- Audible and visual indication of live voltage
- Self-test position ensures that all system functions and indicators are working properly by energizing the complete system
- Designed for use with hot sticks incorporating a universal spline adaptor
- Powered by three standard Alkaline C cell batteries

SPECIFICATIONS


MODEL	275HVD
ELECTRICAL	
Ranges	240V, 2kV, 6kV, 11kV, 22kV, 33kV, 132kV, 275kV
Detection	Range selected @ approximately 10" (25cm) 45% to 65% of range @ approximately 4" (10cm) Greater detection distance obtained with lower range setting (higher sensitivity) than working voltage
MECHANICAL	
Dimensions	3.78 x 9" (96 x 229mm)
Weight	1.30 lbs (0.59kg) batteries included
ENVIRONMENTAL	
Operating Temperature	5° to 130°F (-15° to 55°C)
Storage Temperature	-4° to 150°F (-20° to 65°C)
Humidity	0 to 93% RH @ 104°F (40°C)



Model 275HVD checking for live voltage on main feeder

CONSTRUCTION

← 3.78" (96mm) →

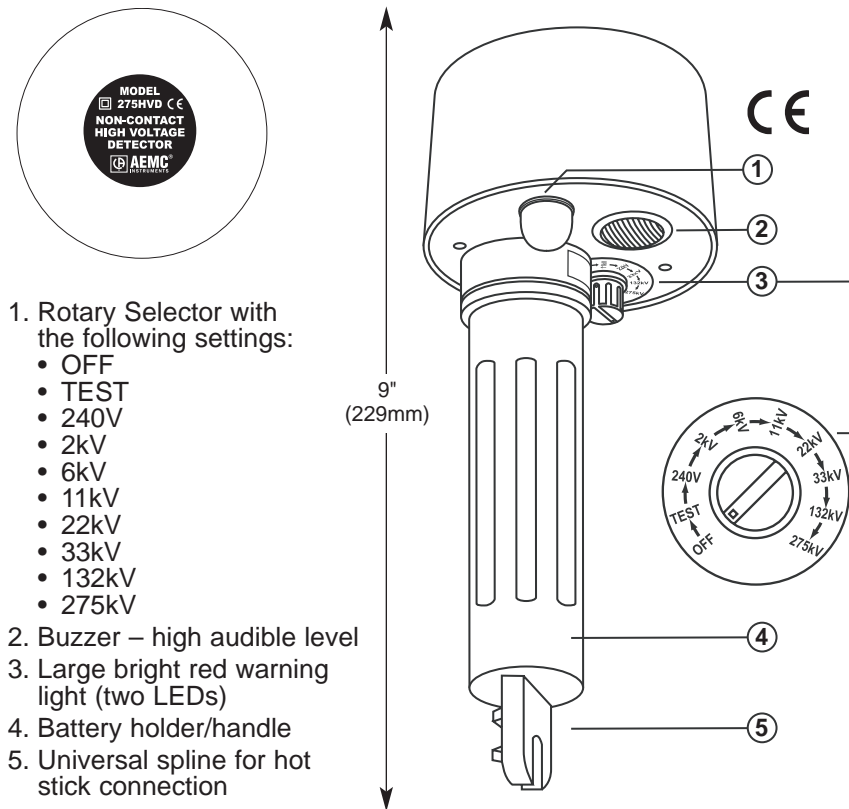

1. Rotary Selector with the following settings:

- OFF
- TEST
- 240V
- 2kV
- 6kV
- 11kV
- 22kV
- 33kV
- 132kV
- 275kV

2. Buzzer – high audible level
3. Large bright red warning light (two LEDs)
4. Battery holder/handle
5. Universal spline for hot stick connection

APPLICATIONS

- ▶ Non-contact detection of live voltages
- ▶ Check and detect live high voltage cables
- ▶ Find faults in cables
- ▶ Check grounding equipment
- ▶ Service neon lighting
- ▶ Trace live wires
- ▶ Check high frequency radiation
- ▶ Detect residual or induced voltages



Universal spline for hot stick connection

ORDERING INFORMATION

CATALOG NO.

Non-Contact High Voltage Detector Model 275HVD (240V to 275kV) Cat. #2131.12

Includes three C cell batteries, padded carrying case and user manual

ONE SOURCE

For All Your Electrical Test & Measurement Instruments

AEMC[®]
INSTRUMENTS

Call our Technical Assistance Hotline for immediate consultation with an applications engineer: (877) 766-5412

OptimumEnergy Products Ltd • (877) 766-5412 • (403) 256-3636 • Fax (403) 256-3431

Visit our website at www.electricitymetering.com 950.BR-275HVD 04/03 Printed in the USA